


Description:

LEDingEdge provides a variety of jumpers to enable the required power to travel from one luminaire to another. Various lengths, ends and black / white options are available to meet your needs. For those that need additional assurance that the jumpers will not unplug we also offer our unique polycarbonate "Cord Grip" accessory .


Features:

- Polarized for direct 12v or 24v DC power supply
- 18/2 AWG (18 gauge wire / 2 wires parallel)
- Wire rated at 105 °C ; Molded ends are rated at 90°C
- Available in black or white
- Available in lengths of, 3", 6", 9", 12", 18", 24", 36", 48", 60" 72" 96" and 120"
- Jumpers come in straight / straight, right-angle / right-angle, straight / stripped or right-angle-stripped variations.
- Contact us should you would like custom orders to meet your specific needs


Straight End (ST)- Straight End (ST)

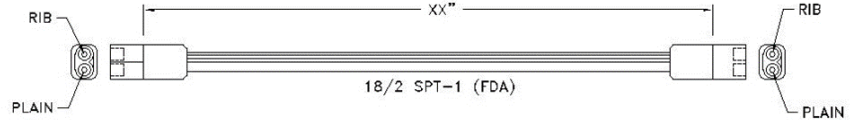


Straight End (ST)-Stripped End (SE)

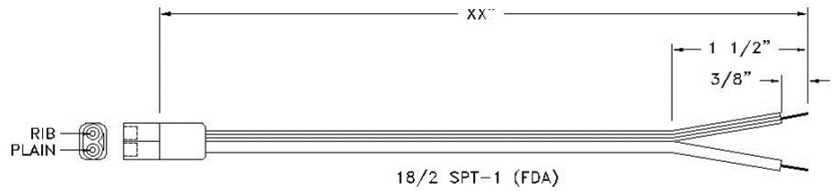

Right Angle End (RA) - Right Angle End (RA)

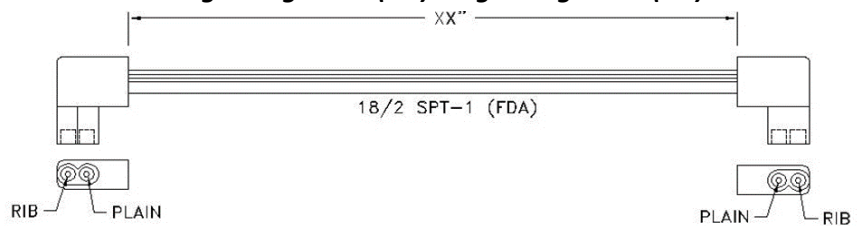

Right Angle End (RA) - Stripped End (SE)

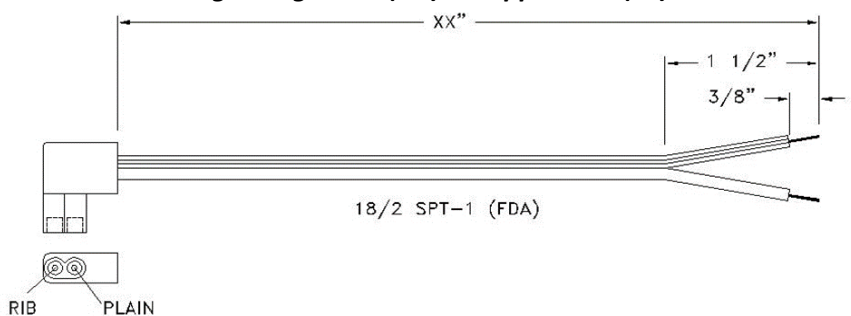

Harness Part Numbers:

Part	-	Length	-	Color	-	Wire Ends
Use "J" for jumpers	-	Chose one of following: 3", 6", 9", 12", 18", 24", 36", 48", 60" 72" 96" and 120"	-	Chose "B" for black or "W" for white	-	Chose "ST-ST" for straight end—straight end Chose "ST-SE" for straight end—stripped end Chose "RA-RA" for right angle end—right angle end Chose "RA-SE" for right angle end—stripped end


Cord Grip Features:

Provides additional assurance that the jumpers will not unplug; made of polycarbonate; available for our Mini (.6" w) and Micro-Mini (.8" w) series.

Cord Grip Part Numbers:

Bracket	Package Quantity	Series	Part Number
Cord Grip	2 20	MIC (.6" width)	O-BRK-MIC-CG-2 O-BRK-MIC-CG-20
Cord Grip	2 20	MIN (.8" width)	O-BRK-MIN-CG-2 O-BRK-MIN-CG-20

Cord Grips

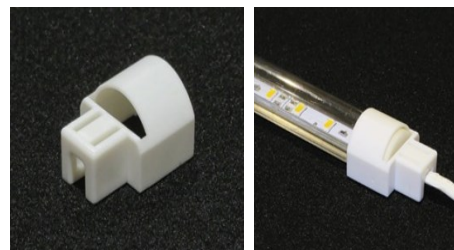

ISO 9001 2015 Certified